



ARTISAN[®]
TECHNOLOGY GROUP

Your **definitive** source
for quality pre-owned
equipment.

Artisan Technology Group

(217) 352-9330 | sales@artisanng.com | artisanng.com

Full-service, independent repair center

with experienced engineers and technicians on staff.

We buy your excess, underutilized, and idle equipment

along with credit for buybacks and trade-ins.

Custom engineering

so your equipment works exactly as you specify.

- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions

Expert team | Trust guarantee | 100% satisfaction

All trademarks, brand names, and brands appearing herein are the property of their respective owners.

Find the *Newport 8800* at our website: **Click *HERE***

PTS-FOPM Series

Fiber Optic Power Meter Modules

Key Features

- Direct fiber input for fiber optic component measurements
- Single and dual-channel versions offered
- Three modules cover 400–1800 nm wavelength range
- Measurement range from -100 to +3 dBm
- Analog output for connection to external instruments
- Available with variety of fiber connector styles

Accessories

Please see the *Fiber Optics and Accessories* Section for fiber optic patchcords, adaptors, and many more accessories that can be used with these modules.



The **PTS-FOPM Series Fiber Optic Power Meters** accept a direct fiber input to acquire power measurements in the 400–1800 nm wavelength range. Both single and dual-channel versions are offered, with five different input connector options to select from.

The low-noise 300 μm diameter detector and eight gain ranges, enable continuous power measurements from a low -100 dBm up to 3 dBm (2 mW).

Each module is individually calibrated to NIST-traceable standards using Newport's in-house calibration facility. Calibration data is taken in 10 nm increments, and electronically stored inside the module, resulting in accurate power measurements over the entire wavelength band.

A certificate of calibration as well as the actual calibration curves recorded are shipped with each module. Annual re-calibration is recommended to assure measurement accuracy.

Specifications


Option Code	SL	IR	IG
Module Type	Si	Ge	InGaAs
Active Diameter (μm)	1000		
Wavelength (nm)	400–1100	780–1800	800–1650
Power Input Range	-100 to +3 dBm (100fW - 2mW)	-80 to +3 dBm (10pW - 2mW)	-100 to +3 dBm (100fW - 2mW)
Accuracy	±5%		
Linearity	±0.5%		
NEP @ 5 Hz and 1 A/W (fW/ $\sqrt{\text{Hz}}$)	20	1	10
Dimensions (H x W x D) [in. (cm)]	5.23 (13.3) x 1.39 (3.5) x 9.09 (23.1)		
Weight [lb (kg)]	1.75 (0.8)		
Operating Temperature	0°C to 40°C		
Storage Temperature	-20°C to 60°C		

Ordering Information

When ordering a Fiber Optic Power Meter Module, please specify the following Model number:

Order example: PTS-FOPM-SL0265

Dual-channel Fiber Optic Power Meter Module with Silicon detector, operating in the 400–1100 nm wavelength range, and SC/PC connector input.

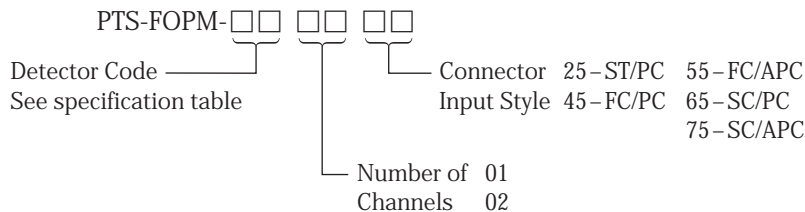

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at artisanng.com for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisanng.com | artisanng.com

